


6" Cast Iron Ball Valve Flanged, SS304 Ball

Cast iron flanged ball valve with stainless steel ball and PTFE seat, gasket, and packing.

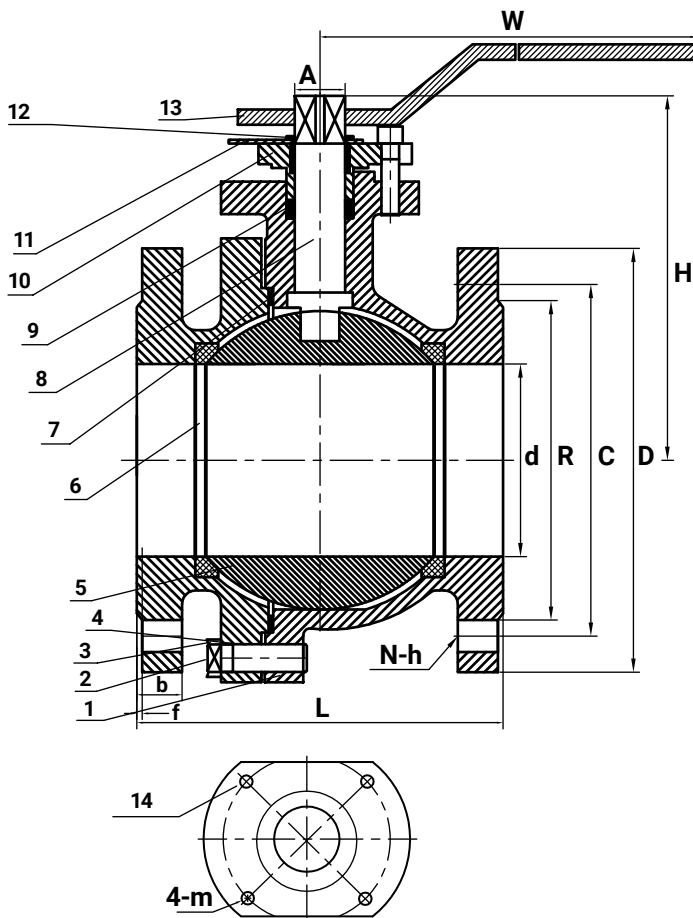

Size	6"
Connections	Flanged / ANSI 125
Length (End to End)	15.5"
Weight	155 lbs

Features

- Fusion-Bonded Epoxy Coating Inside & Outside
- Flanges Conform to ANSI B16.1

Materials List

No.	Part Name	Material
1	Body	Cast Iron (ASTM A126-B)
2	Bonnet	Cast Iron (ASTM A126-B)
3	Nut	Carbon Steel
4	Bolting	Carbon Steel
5	Ball	Stainless Steel (SS304)
6	Seat	PTFE
7	Gasket	PTFE
8	Stem	Stainless Steel (SS304)
9	Stem Packing	PTFE
10	Gland Flange	Cast Iron (ASTM A126-B)
11	Stop Collar	Carbon Steel
12	Circlip	Carbon Steel
13	Lever	Ductile Iron (A536 60-40-18)
14	Gland Bolt	Cast Iron (ASTM A126-B)

Dimensions

Size	d	L	D	C	R	b	N-h	f	H	W	A	4-m
in.	in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	mm (in.)	in. mm	in. mm	in. mm	in. mm	
3"	3 ³ / ₈ 80	8 203	7 ¹ / ₂ 191	6 153	5 127	3/4 19.1	4-19 (3/4) 1/16 1.6	8 ³ / ₄ 222	13 ³ / ₄ 350	3/4 19	M10	
4"	3 ¹⁵ / ₁₆ 100	9 229	9 229	7 ¹ / ₂ 191	6 ³ / ₁₆ 157	1 ¹ / ₁₆ 23.9	8-19 (3/4) 1/16 1.6	8 ³ / ₄ 222	15 ³ / ₄ 400	7/8 22	M10	
6"	5 ⁷ / ₈ 150	15 ¹ / ₂ 394	11 279	9 ¹ / ₂ 242	8 ¹ / ₂ 216	1 25.4	8-22 (3/4) 1/16 1.6	10 ¹³ / ₁₆ 275	23 ³ / ₈ 600	1 ¹ / ₁₆ 27	M16	